

B16FC-NGA

PN16

DN50-600



SPECIFICATION

NON-RISING STEM · INSIDE SCREW
BS 5150 · FLANGED TO BS 4504 PN16

PRESSURE / TEMPERATURE RATINGS

	DN50~300	DN350~600
Working Pressure	16 bar	10 bar
Testing Pressure	Shell : 24 bar Seat : 17.6 bar	Shell : 15 bar Seat : 11 bar
Working Temperature	-10 °C to 120 °C	
Suitable Media	Water, Oil & Gas	


* 16 bar pressure rating is available for DN350~600. The body material shall be Ductile Iron.

MATERIALS

Part	Material	BS
Body	Cast Iron	1452 Gr. 220
Bonnet	Cast Iron	1452 Gr. 220
Disc	Cast Iron	1452 Gr. 220
Seat Ring	Gunmetal	1400 LG2
Stem	Brass Stainless Steel	2874 CZ124 970 420S37
Packing	Graphite	Non-Asbestos
Handwheel	Cast Iron	1452 Gr.220

DIMENSIONS

Size mm	L mm	H mm	D mm
50	178	325	190
65	191	325	190
80	203	341	190
100	229	420	300
125	254	477	300
150	267	542	350
200	292	668	350
250	330	750	400
300	356	835	450
350	381	1015	508
400	406	1120	558
450	432	1210	610
500	457	1250	610
600	508	1390	762

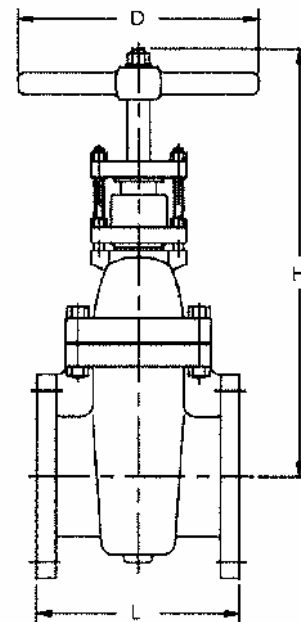

Note:

1. Other specifications and flange standards are available upon request.
2. Design and specifications are subject to change without prior notice.