


## J10FC-UBU J10FD-UBU

### 10K

DN700~1200

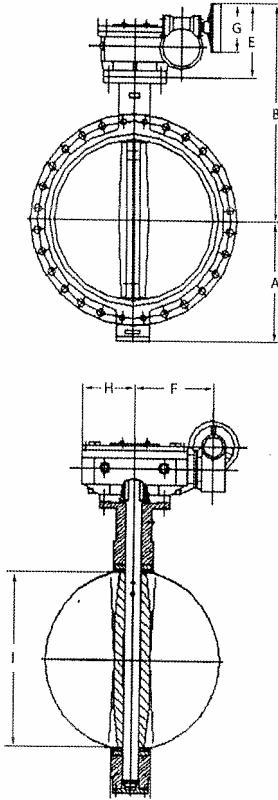

#### SPECIFICATION

UNIVERSAL TYPE · FLANGED TO JIS B2239 10K  
CONFORMS TO MSS SP-67-1995 / API 609-91  
DOUBLE-STAGE WORM GEAR OPERATOR

#### PRESSURE / TEMPERATURE RATINGS

Working Pressure	1.0 Mpa
Testing Pressure	Shell : 1.5 Mpa Seat : 1.1 Mpa
Working Temperature	-20 °C to 110 °C (EPDM Seat) -10 °C to 80 °C (NBR Seat)
Suitable Media	Water, Oil & Gas

#### MATERIALS

Part	Material	JIS
Body	Cast Iron	FC 250
	Ductile Iron	FCD 400
Disc	Ductile Iron	FCD 400
	Aluminum Bronze	ALBC 2
	Stainless Steel 304	SCS 13
	Stainless Steel 316	SCS 14
Seat Ring	EPDM / NBR / Viton	
Shaft	Stainless Steel 410	SUS 410
	Stainless Steel 431	SUS 431
	Stainless Steel 316	SUS 316
Taper Pins	Stainless Steel 316	SUS 316
Key	Carbon Steel	
O-Ring	NBR	
Bushing	Luberized Bronze	

#### DIMENSIONS

Size mm	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	I mm	L Mm	Cv 90°
700	624	902	357	173	382	243	435	173	675	165	49500
750	560	1042	357	173	382	243	435	173	725	167	73426
800	608	1048	357	173	382	243	435	173	773	190	78250
900	656	1196	410	201	476	278	435	201	840	203	87500
1000	800	1197	410	201	476	278	435	201	940	218	119750
1050	777	1334	410	201	476	278	435	201	999	251	121000
1200	864	1468	509	214	528	458	435	310	1126	276	154000

#### Note:

1. Design and specifications are subject to change without prior notice.
2. Other specifications and flange standards are available upon request.
3. Actuator mounting flange conforms to ISO 5211 drilling.
4. The butterfly valve can be supplied with electric or pneumatic actuator.