


### SEW



### SEF

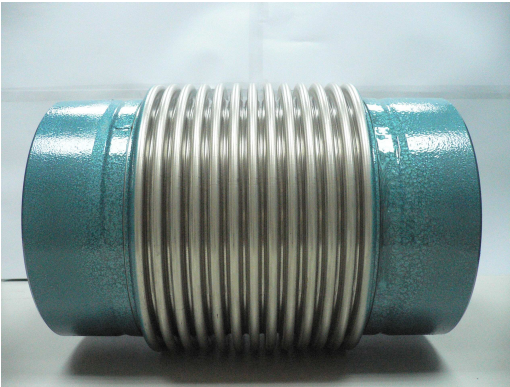

### ◆ CONSTRUCTION

PARTS	MATERIAL	REMARK (OPTION)
BELLOWS	SUS 304	SUS 316
FLANGE	CARBON STEEL	SUS 304 / 316
INTERNAL SLEEVE	SUS 304	SUS 316
TUBE END	CARBON STEEL	SUS 304 / 316
TIE RODS	CARBON STEEL	

\* Flange with ANSI, JIS, DIN, B.S. Standard.

### SPECIFICATION

Nominal Bore		Total Length	Bellows		Axial Movement		Force to Compress	Effective Area	Working Pressure
mm	Inch		O.D.	Corr's	mm	mm			
15	1/2	250	25	36	+5	-25	34	5.4	10
20	3/4	250	32	31	+5	-25	34	5.4	10
25	1	250	38	28	+5	-25	31	8.2	10
32	1-1/4	350	49	36	+10	-40	135	18.6	10
40	1-1/2	350	60	32	+10	-40	150	22.2	10
50	2	350	78	24	+10	-40	180	34.5	10
65	2-1/2	350	92	20	+10	-40	280	52.5	10
80	3	350	108	20	+10	-40	260	71.2	10
100	4	350	132	16	+10	-40	280	110.5	10
125	5	350	163	15	+10	-40	400	168.7	10
150	6	350	190	14	+10	-40	530	233.9	10
200	8	350	252	13	+10	-40	650	389.1	10
250	10	350	315	12	+10	-40	750	592.2	10
300	12	350	366	12	+10	-40	850	829.7	10

⊛ Working pressure 16 kg/cm<sup>2</sup> is available upon request.