

A125FC-NGA

Class 125

2"~24"



SPECIFICATION

NON-RISING STEM · INSIDE SCREW

MSS SP-70 · FLANGED TO ANSI CLASS 125

PRESSURE / TEMPERATURE RATINGS

	2"~12"	14"~24"
Working Pressure	200 psi	150 psi
Testing Pressure	Shell : 350 psi Seat : 200 psi	Shell : 262 psi Seat : 150 psi
Working Temperature	14 °F to 248 °F	
Suitable Media	Water, Oil & Gas	


* 200 psi pressure rating is available for 14"~24". The body material shall be Ductile Iron.

MATERIALS

Part	Material	ASTM
Body	Cast Iron	A126 Class B
Bonnet	Cast Iron	A126 Class B
Disc	Cast Iron	A126 Class B
Seat Ring	Gunmetal	B62 C83600
Stem	Brass Stainless Steel	B16 C36000 AISI 420
Packing	Graphite	Non-Asbestos
Handwheel	Cast Iron	A126 Class B

DIMENSIONS

Size inch	L Inch	H Inch	D Inch
2	7	11	7.5
2-1/2	7.5	12.5	7.5
3	8	13.1	7.5
4	9	15.2	11.8
5	10	17.8	11.8
6	10.5	19.8	13.8
8	11.5	25	13.8
10	13	28.9	15.7
12	14	34.4	17.7
14	15	37	20
16	16	40.6	22
18	17	42.2	24
20	18	48.4	24
24	20	54.5	30

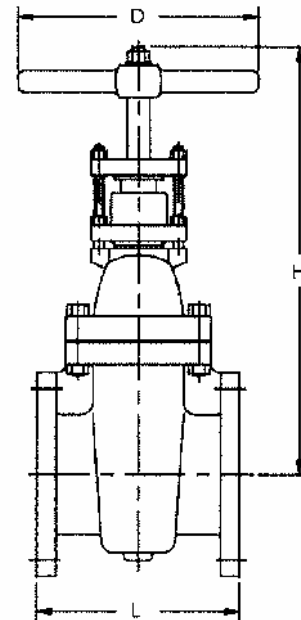

Note:

1. Other specifications and flange standards are available up on request.
2. Design and specifications are subject to change without prior notice.